

# PowerCore™ Intelligent Xpansion™ IX3212 PDM



Models	IX3212-24	
Inputs	Analog	8
	Digital	12
Outputs	Digital	12
	PWM	12
	H-Bridge	6

Murphy's PowerCore™ Intelligent Xpansion™ Power Distribution Module (PDM) expands CAN bus control networks by replacing existing relay and fuse boxes with more reliable solid-state switches that can directly drive work lights, wiper motors, cooling fans, directional DC motors and other high current loads.

Each of the 12 IX3212 outputs can switch or proportionally control up to 15 A loads in 2.5 A increments and feature built-in over-current detection and shutdown capability. Outputs are paired to run up to six electric motors with H-bridge direction control. Twelve digital inputs monitor switched battery, ground and floating inputs. Additionally, eight analog inputs are available with a 5V sensor supply.

Wiring length is reduced and costs are cut by remotely locating the IX module near loads and signals. The I/O is multiplexed using a CAN bus network which allows engineers to greatly simplify harness design for ease of installation and improved reliability.

For applications not requiring a CAN bus controller, the inputs can directly trigger the outputs so there is no need for a separate controller.

The enclosure is fully sealed and potted to withstand wash-down and protect from dust.

FEATURES	
<b>12 Outputs</b>	<ul style="list-style-type: none"> <li>(6) 15 A max per channel, 500 Hz</li> <li>(6) 15 A max, 1 kHz</li> <li>Channel overload set in 2.5 A increments</li> <li>High-side, open-loop PWM and directional DC motor control (H-bridge) modes</li> <li>Off-state leakage current &lt;0.1 mA</li> </ul>
<b>20 Inputs</b>	<ul style="list-style-type: none"> <li>12 digital, tri-state, input impedance 7.7 kΩ</li> <li>6 analog, 0-5 V, input impedance 100 kΩ pull-down</li> <li>2 analog, resistive, input impedance 2.2 kΩ pull-up</li> <li>10 bit resolution on all analog inputs</li> </ul>
<b>Sensor Supply</b>	5V @ 70 mA
<b>Communications</b>	1 CAN 2.0B, 250 kbps, J1939 proprietary messaging
<b>Mating Connectors</b>	Deutsch DTHD, DT, and DTP Series <ul style="list-style-type: none"> <li>J1, J2 – DTHD06-1-4S</li> <li>J3 – DT06-12SA (Gray)</li> <li>J4 – DT06-12SB (Black)</li> <li>J5 – DT06-12SC (Green)</li> <li>J6 – DTP06-2S</li> </ul>
<b>Certifications</b>	CE mark


SPECIFICATIONS	
<b>Operating Voltage</b>	8-32V (IX3212-24) for 12V and 24V Systems
<b>Total Current</b>	70 A maximum continuous
<b>Dimensions</b>	245 mm (L) x 140 mm (W) x 50 mm (H)
<b>Mass</b>	0.9 kg (2.0 lb)
<b>Operating Temperature</b>	-40°F to 185°F (-40°C to 85°C)
<b>Storage Temperature</b>	-40°F to 275°F (-40°C to 135°C)
<b>Electrical and EMI/EMC</b>	2004/108/EC and 2006/95/EC directives IEC 61000-4-3, -4-6 and -4-8 EN 60945 / CISPR 11 EN 61326-1
<b>Shock</b>	30G, 3 cycles
<b>Vibration</b>	5-25g, 50-2,000Hz, 72 hrs per axis
<b>Sealing</b>	IP66 and 67, SAE J1455 4.5.3 (10,300 kPa @ 50°C and 100 mm away for 15 min)

# Connectors

Connector J1		
Pin	Name	Function
1	GND	Ground (-)
Connector J2		
Pin	Name	Function
1	PWR	Power (+)
Connector J3		
Pin	Name	Function
1	5V_GND	5V Sensor Ground (-)
2	DI12	Digital Input 12
3	DO7/PWM7	Digital Output 7 / PWM 7 (15A, 100Hz)
4	DO8/PWM8	Digital Output 8 / PWM 8 (15A, 100Hz)
5	DO9/PWM9	Digital Output 9 / PWM 9 (15A, 100Hz)
6	DO10/PWM10	Digital Output 10 / PWM 10 (15A, 100Hz)
7	AI8	Analog Input 8 (0-5V)
8	AI7	Analog Input 7 (0-5V)
9	AI6	Analog Input 6 (0-5V)
10	AI5	Analog Input 5 (0-5V)
11	AI4	Analog Input 4 (0-5V)
12	5V_PWR	5V Sensor Power (+)
Connector J6		
Pin	Name	Function
1	DO12/PWM12	Digital Output 12 / PWM 12 (15A, 100Hz)
2	DO11/PWM11	Digital Output 11 / PWM 11 (15A, 100Hz)

Connector J4		
Pin	Name	Function
1	DO1/PWM1	Digital Output 1 / PWM 1 (15A, 1kHz)
2	DO2/PWM2	Digital Output 2 / PWM 2 (15A, 1kHz)
3	DO3/PWM3	Digital Output 3 / PWM 3 (15A, 1kHz)
4	DO4/PWM4	Digital Output 4 / PWM 4 (15A, 1kHz)
5	DO5/PWM5	Digital Output 5 / PWM 5 (15A, 1kHz)
6	DO6/PWM6	Digital Output 6 / PWM 6 (15A, 1kHz)
7	AI3	Analog Input 3 (0-5V)
8	AI2	Analog Input 2 (Resistive)
9	AI1	Analog Input 1 (Resistive)
10	DI11	Digital Input 11
11	DI2	Digital Input 2 (Source Address 1)
12	DI1	Digital Input 1 (Source Address 0)
Connector J5		
Pin	Name	Function
1	CANLO	CAN - (Green)
2	DI3	Digital Input 3
3	DI4	Digital Input 4
4	DI5	Digital Input 5
5	DI6	Digital Input 6
6	5V_GND	5V Sensor Power (-)
7	5V_PWR	5V Sensor Power (+)
8	DI7	Digital Input 7
9	DI8	Digital Input 8
10	DI9	Digital Input 9
11	DI10	Digital Input 10
12	CANHI	CAN + (Yellow)

# Dimensions

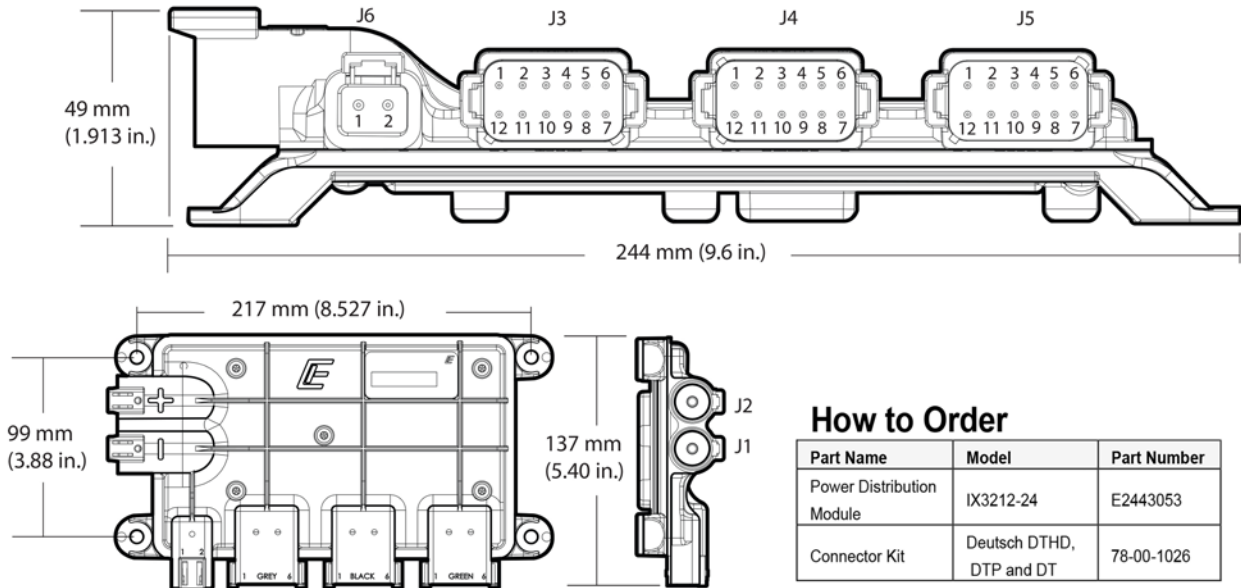

# How to Order

Part Name	Model	Part Number
Power Distribution Module	IX3212-24	E2443053
Connector Kit	Deutsch DTHD, DTP and DT	78-00-1026

**ENOVATION CONTROLS CORPORATE HEADQUARTERS**  
5311 S 122ND EAST AVENUE  
TULSA, OK 74146

**ENOVATION CONTROLS – SAN ANTONIO OFFICE**  
5757 FARINON DRIVE  
SAN ANTONIO, TX 78249

**ENOVATION CONTROLS – HOUSTON OFFICE**  
105 RANDON DYER RD  
ROSENBERG, TX 77471

**ENOVATION CONTROLS LTD. – UNITED KINGDOM**  
CHURCH ROAD LAVERSTOCK  
SALISBURY SP1 1QZ UK

**MURPHY ECONTROLS TECHNOLOGIES (HANGZHOU) CO, LTD.**  
77 23RD STREET  
HANGZHOU ECONOMIC & TECHNOLOGICAL DEVELOPMENT AREA  
HANGZHOU, ZHEJIANG 310018 CHINA

## DOMESTIC SALES & SUPPORT

**ECONTROLS PRODUCTS**  
PHONE: 210 495 9772  
FAX: 210 495 9791  
EMAIL: INFO@ECONTROLS.COM  
WWW.ECONTROLS.COM

**MURPHY PRODUCTS**  
PHONE: 918 317 4100  
FAX: 918 317 4266  
EMAIL: SALES@FWMURPHY.COM  
WWW.FWMURPHY.COM

**MURPHY CONTROL SYSTEMS & SERVICES**  
PHONE: 281 633 4500  
FAX: 281 633 4588  
EMAIL: CSS-SOLUTIONS@FWMURPHY.COM

**MURPHY INDUSTRIAL PANEL DIVISION**  
PHONE: 918 317 4100  
FAX: 918 317 4124  
EMAIL: IPDSALES@FWMURPHY.COM

## INTERNATIONAL SALES & SUPPORT

**UNITED KINGDOM**  
PHONE: +44 1722 410055  
FAX: +44 1722 410088  
EMAIL: SALES@ENOVATIONCONTROLS.EU  
WWW.FWMURPHY.EU

**CHINA**  
PHONE: +86 21 6237 5885  
FAX: +86 21 6237 5887  
EMAIL: APSALES@FWMURPHY.COM

**LATIN AMERICA & CARIBBEAN**  
PHONE: 918 317 2500  
EMAIL: LASALES@FWMURPHY.COM

**SOUTH KOREA**  
PHONE: +82 70 7951 4100  
EMAIL: SKOREASALES@FWMURPHY.COM

**INDIA**  
PHONE: +91 91581 37633  
EMAIL: INDIASALES@FWMURPHY.COM

**ISO 9001**  
REGISTERED



USA (TULSA) - ISO 9001:2008 FM 28221  
USA (ROSENBERG) - ISO 9001:2008 FM 28222  
UK - ISO 9001:2008 FM 29422  
CHINA - ISO 9001:2008 FM 523851  
Registered Facilities

Printed in the USA